Manage nodes


ActiveServer can be run in either a **single node** or **multi node** setup. The details for these nodes can be viewed on the **Deployment** page under the **Nodes** tab. This is also where you can set the logging level for a particular node, if it requires a different setting to the system wide log level setting.



A guide on multi node setups will be provided in a future document version.

User Access

A user requires the **System admin** role to view and edit node settings.

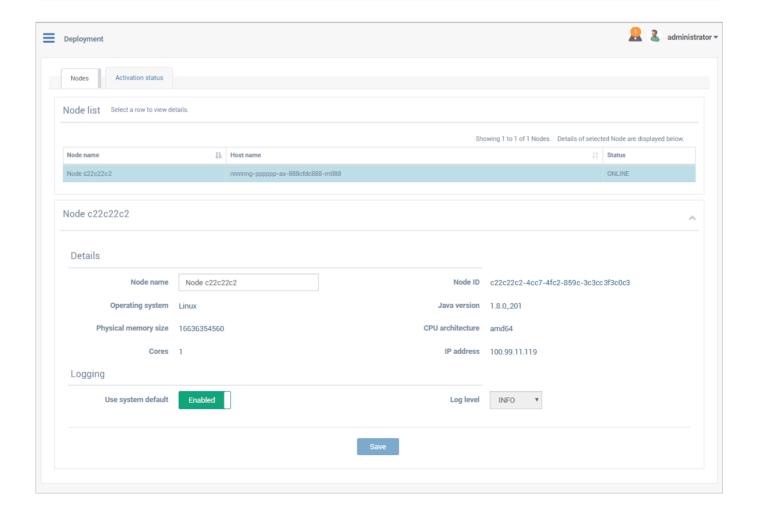

Node details

Select a node from the **Node list** to view its details:

- Node name editable name that can be given to the node to keep track of status.
- Node ID system generated UUID for the node in the database.
- Operating system operating system being used for the node's server.
- Java version Java version being used for the node's server.
- Physical memory size total amount of physical memory installed on the node's server.
- CPU architecture type of CPU architecture chip installed on the node's server.
- Cores amount of logical cores installed on the node's server.
- IP address IP address that the node is hosted on.

Logging

If a different level of logging is required for a particular node, the following settings can be changed:

- Use system default If *Enabled*, the node will use the system wide log level setting. If *Disabled*, log level for the node can be changed manually.
- Log level Available to be edited if Use system default is *Disabled*, allowing the log level to be changed.